



NS Series

Single-Phase UPS 1-6 kVA

Premium power protection for "mission-critical" application.

The NS Series UPS is a family of high-density, performance for advanced backup power and power quality management for PCs, workstations, and servers. Featuring double conversion on-line technology, the NS series UPS protects your data by supplying reliable, network-grade power. With capacity up to 6kVA in a convenient tower form, small footprint, designed to be installed in an office or computer room. Customers looking for extremely tight voltage and frequency regulation, internal bypass, and input power factor correction will find them in the NS series UPS.




NS Series

Single-Phase UPS 1-6kVA


"Easy-to-install" for quality power management.




Rear Panel



NS1500, NS1600



NS2200, NS2400,
NS3000, NS3200

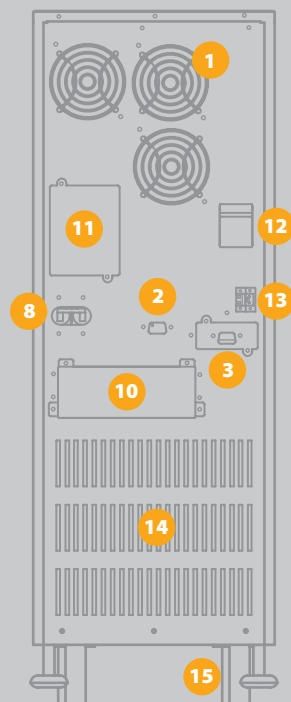

NS5000, NS6000

- | | | |
|--|-------------------------|-----------|
| 1 Fans | 6 Input Fuse | 13 EPO |
| 2 Standard RS232 port | 7 Output Fuse | 14 Vent |
| 3 Communication ports:
DB9, USB, AS400,
SNMP/HTTP (Option) | 8 Input Breaker | 15 Wheels |
| 4 External Battery
Connectors | 9 Inlet | |
| 5 Outlets | 10 Terminal Blocks | |
| | 11 Manual Bypass Switch | |
| | 12 Battery Fuse Holder | |

Features & Benefits

True On-Line Double Conversion

To ensure clean, no-break power for a wide range of mission-critical applications.

Advanced Microprocessor Control.

Power failure, power restored, battery failure or other events will be detected and the user informed. A shutdown will be initiated when the batteries are exhausted or a critical technical problem occurs with the UPS.

Manual Bypass Switch

Failsafe internal bypass switch with manual control to ease of maintenance.

Green Mode Function

The NS Series switches to bypass when no load is present, but immediately switches back to inverter when the load returns. This feature offers more economical operation when power supply is more reliable without compromising protection to the load.

Easy To Read Visual Display

A simple, clear visual display at the front of the unit gives an immediate indication of system status.

RS232 As Standard

The UPS management software is installed on a server or workstation connected to each UPS via the serial port.

Integrated Smartcard Slot Providing a Choice

This allows the user to take advantage of a growing range of add-on cards providing facilities such as SNMP, remote web browser-based management, along with USB, AS400, and DB9 cards.

Optional Specialized UPS Management Software

Highly manageable power protection for sensitive equipment. Retaining the legendary reliability of its predecessor, the NS series brings high-end features and manageability to even the smallest unit in the NS range.

Small Footprint


Compact tower, designed to be installed in an office or computer room, taking up very little valuable space in often cramped high resource areas.

Applications

- Computers
- Network Servers
- Workstations
- Wireless Communications
- Other Electronic Peripherals

Other major UPS monitoring Software and SNMP/ HTTP Cards compatible with all NS Series UPS

- Internal or External Networking Card: Net Agent II or USHA PRO (SNMP, HTTP, PPP, TCP/IP, etc.)

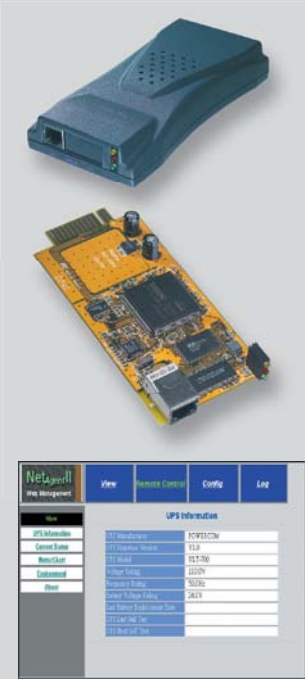

- UPSilon via RS232



- Cruiser via RS232



- Rups via Contact Closure (DB9)



NS Series

Single-Phase UPS 1-6kVA

Specifications

Model No.	S1000	NS1500	NS1600	NS2200	NS2400	NS3000	NS3200	NS5000	NS6000
Topology	True On - Line , Double Conversion								
On- battery Output Waveform	True Sine Wave								
Number of Phase	Single (1 ϕ 2W + G)								
Input									
Maximum Capacity (VA/ W)	1000VA/ 700W	1500VA/ 1050W	1600VA/ 1120W	2200VA/ 1540W	2400VA/ 1680W	3000VA/ 2100W	3200VA/ 2240W	5000VA/ 3500W	6000VA/ 4200W
Input Voltage Range	80 138VAC 160 to 276 VAC	80 to 138 VAC	160 to 276 VAC	80 to 138 VAC	160 to 276 VAC	80 to 138 VAC	160 to 276 VAC	160 to 275 VAC	160 to 275 VAC
Nominal Input Frequency	50 / 60 Hz + / - 5 Hz								
Input PFC	> 0.98 @ full load								
Input Short Protection	Circuit Breaker								
Output									
Nominal Output Voltage	100/ 110/ 115/ 120 VAC or 200/ 208/ 220/ 230/ 240 VAC	100/ 110/ 115/ 120 VAC	200/ 208/ 220/ 230/ 240 VAC	100/ 110/ 115/ 120 VAC	200/ 208/ 220/ 230/ 240 VAC	100/ 110/ 115/ 120 VAC	200/ 208/ 220/ 230/ 240 VAC	100/ 110/ 115/ 120 VAC (With ISO. TX) or 200/ 208/ 220/ 230/ 240 VAC	100/ 110/ 115/ 120 VAC (With ISO. TX) or 200/ 208/ 220/ 230/ 240 VAC
Output Voltage Regulation	+ / - 3 %	+ / - 2 %						+ / - 2 %	
Output T.H.D	< 3 % @ Linear Load								
High Efficiency Mode (AC to AC)	> 83 %	> 87 %			> 90 %			> 89 %	
Crest Factor	3 : 1								
Start on Battery	Yes								
Output Frequency	50 / 60 Hz (Autotracking)								
Battery									
Battery Type	Sealed Lead-Acid 12VDC 7Ah ; Maintenance Free								
Number of Battery Cells	3 x 12 VDC/ 7Ah	4 x 12 VDC/ 7Ah		6 x 12 VDC/ 7Ah		8 x 12 VDC/ 7Ah		16 x 12 VDC/ 7Ah	
Typical Backup Time (Full/ Half load)	7/ 20 minutes	6/ 15 minutes						10/ 30 minutes	7/ 25 minutes
Recharge Time to 90%	8 hours								
Advance Warning Diagnostics									
Visual Indication	Fault, Line, Inverter, Load, Bypass, Green Mode, Battery Discharge/ Recharge Level, Boost/ DC Mode (All for S & NS series); Charger, PFC Overload (NS series only).								
Audible Alarms	DC Mode, Low Battery, Voltage Error, Frequency Error, High Temperature, Over Load, Fault (All for S & NS series); Charger, PFC Overload (NS series only).								
Communication Interface									
Communication Port	RS232 (Standard); DB9 or AS400 or USB or SNMP/ HTTP (Optional)								
SNMP Manageable	Yes								
Environmental									
Operating Temperature	0°C - 40 °C (32 °F - 104 °F)								
Storage Temperature	- 15 °C - 50°C (5 °F - 122 °F)								
Relative Humidity	0 % to 95 % non-condensing								
Audible Noise (at 1 meter from surface of unit)	<= 45dBA								
Mechanical									
Dimensions (W x D x H)	152 x 400 x 220mm (6.0" x 15.7" x 8.7")	150 x 450 x 265 mm (5.9" x 17.7" x 10.4")		193 x 455 x 323 mm (7.6" x 17.9" x 12.7")		193 x 485 x 323 mm (7.6 x 19.1 x 12.7 in)		263 x 630 x 520 mm (10.4" x 24.8" x 20.5") (w/o ISO.TX.) / 263 x 630 x 755 mm (10.4" x 24.8" x 29.7") (with ISO. TX.)	
Weight-with Battery ISO. TX.	N/A								152 kg (334.8 lb)
Weight-with Battery w/o ISO. TX.	15 kg (33.0 lb)	19 kg (41.9 lb)		30.5 kg (67.2 lb)		38 kg (83.7 lb)		117 kg (257.7 lb)	
Weight w/o Battery w/o ISO. TX..	7.5 kg (16.5 lb)	9.5 kg (20.9 lb)		15.5 kg (34.1 lb)		18 kg (39.6 lb)		74 kg (163.0 lb)	

* Specifications subject to change without notice.



Asia

Allis Electric Co., Ltd.

12F, 19-11, San-chung Road, Nankang District, Taipei 115, Taiwan
TEL +886 2 2655 3456 FAX +886 2 2655 2286~7
E-mail: sales@allis.com.tw
http://www.allis.com.tw

Sheen Asia Electronic (Guangzhou) Co., Ltd.

2F, Building A2, Beiwei Industrial Area, GETDD, Guangzhou,
People's Republic of China, 510730
TEL +86 20 8222 1370/1 FAX +86 20 8222 1419
E-mail: sales@sheenasia.com
http://www.sheenasia.com

Europe

AEC S.p.A.

Via Vesuvio 1, I-20054 NOVA MILANESE MI, Italy
TEL +39 02-91082075 FAX +39 02-700427499
E-mail: sales@aeceuro.com
http://www.aeceuro.com

AEC Power Control Ltd.

Systems House, Eckington Business Park, Rotherside Road,
Eckington, Sheffield, S21 4HL, UK
TEL +44 (0)1246 431431 FAX +44 (0)1246 431444
E-Mail: info@aeceuro.co.uk
http://www.aeceuro.co.uk

North America

IMP Enterprises, Inc.

18218 East McDermott, Suite E, Irvine, CA 92614, USA
TEL +1 949 477 9198 FAX +1 949 477 9195
E-mail: sales@impenterprises.com
http://www.impenterprises.com

