

4

3



2

1


PART NO. SEE TABLE 1

CUSTOMER DRAWING


REVISIONS			
LTR	DESCRIPTION	Drawing	DATE
i	修改圖面與實物相符	GARY	02/27/07
J	新增端子折彎剖視圖	GARY	05/17/07
k	修改塑膠壁厚	GARY	09/19/07

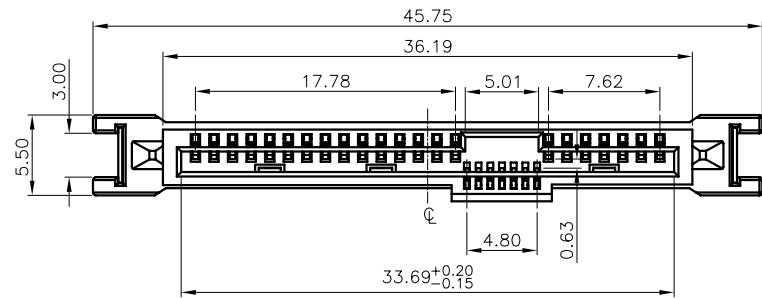

SECTION A-A

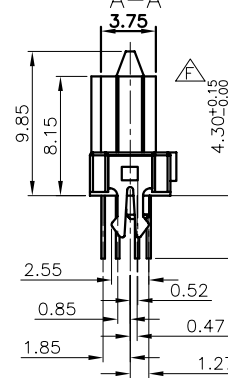

SECTION B-B

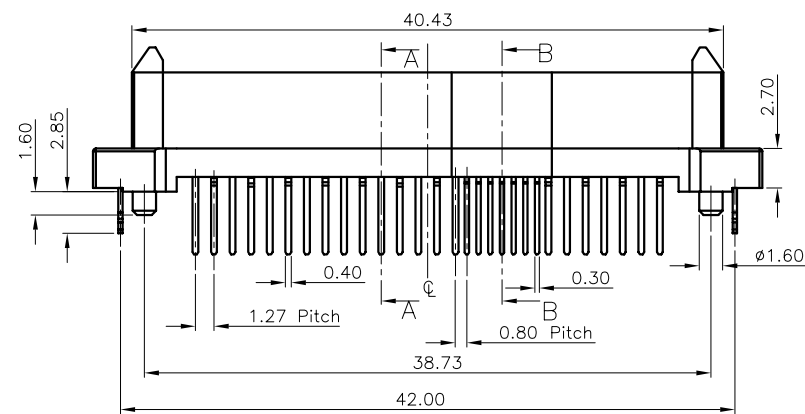

RECOMMENDED PCB LAYOUT

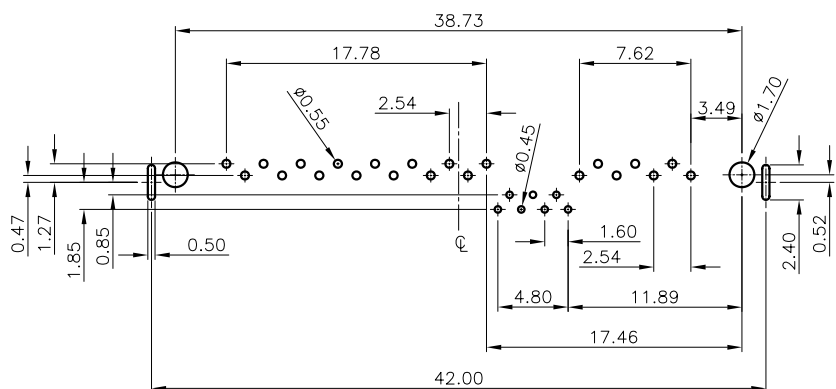


TABLE 1

PART NO.	PLATED	COLOR FOR THE PLASTIC	DIM A	NOTE
020-01-00229	15 U"	PA BLACK	3.0	ADD LATCH
020-01-00230	G/F	PA BLACK	3.0	ADD LATCH
020-01-00184	15 U"	PA BLACK	2.6	NO LATCH
020-01-00183	G/F	PA BLACK	2.6	NO LATCH
020-01-00147	15 U"	PA BLACK	4.3	ADD LATCH
020-01-00146	G/F	PA BLACK	4.3	ADD LATCH
020-01-00102	15 U"	LCP BLACK	4.3	ADD LATCH
020-01-00101	G/F	LCP BLACK	4.3	ADD LATCH

NOTE:

- MATERIAL :
HOUSING : High Temperature Thermoplastic , UL94V-0, COLOR : BLACK
TERMINAL(max): Copper Alloy, THICKNESS = 0.30 mm
TERMINAL(min): Copper Alloy, THICKNESS = 0.25 mm
FORKLOCK: Copper Alloy, THICKNESS = 0.30 mm
- PLATING:
CONTACT: GOLD OVER 50u" MIN NICKEL UNDERPLATE (SEE TABLE 1)
SOLDER TAIL: 150u" MIN MISTY TIN 50u" MIN NICKEL UNDERPLATE
GOLD SPECIFICATION: SEE TABLE
- ELECTRONICAL SPECIFICATION:
CURRENT RATING: 1.5 AMPERE PER CONTACT
CONTACT RESISTANCE: 30 MILLIOHMS MAX.
INSULATION RESISTANCE: 1000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING VOLTAGE: 500 VDC.
OPERATING TEMPERATURE: -20°C ~ +85°C
- MEETS THE REQUIREMENTS OF DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL OF 27 JANUARY 2003 ON THE RESTRICTION OF THE USE OF CERTAIN HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT (ROHS)

DIMENSION ARE MILLIMETERS		APPROVALS		DATE		PART NO.			
TOLERANCES ARE : DECIMALS		DRAWN	GARY	09/19/07		020-01-00101/00102			
.X ± 0.20		CHECKED				020-01-00146/00147			
.XX ± 0.15		APPROVALS				020-01-00183/00184			
ANGLE: X ± 3°						020-01-00229/00230			
						TITLE: ASSEMBLY OF SAS 29P Vertical DIP(4 ROW)			
						SIZE	SCALE :	DRAWING NO.	REV.
						mm	1 : 1	000187	k
						ID NO.	XXXXXXXXXX	SHEET 1 OF 1	

DESCRIPTION

4

3

2

1