PART NO.	SEE TABLE

CUSTOMER DRAWING

REVISIONS			
LTR	DESCRIPTION	Drawing	DATE
B	新版發行	Jun.L	04/28'/08

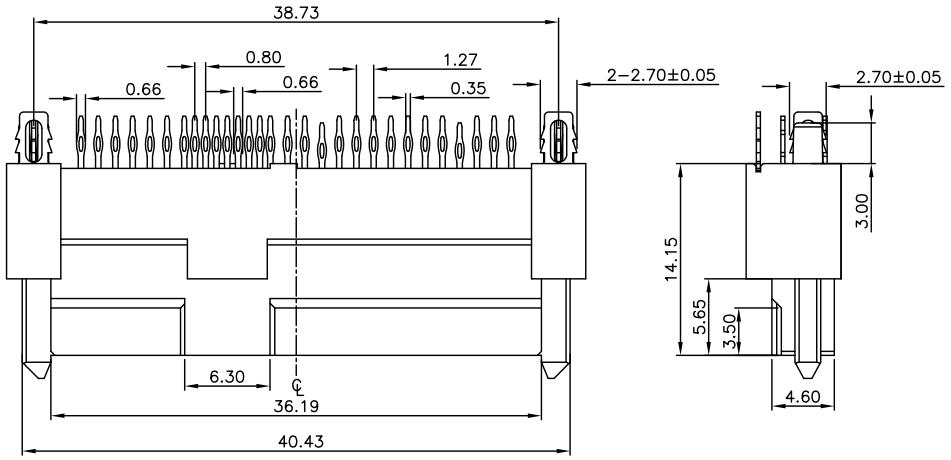

料 號	端子電鍍	塑膠材質
020-01-00357	15u"	PBT
020-01-00358	30u"	PBT
020-01-00361	15u"	LCP
020-01-00362	30u"	LCP

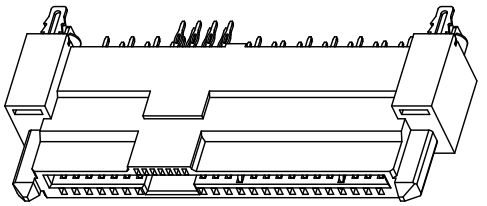

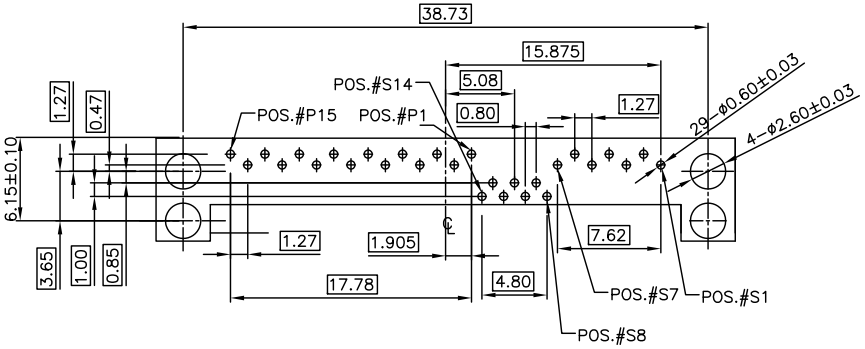

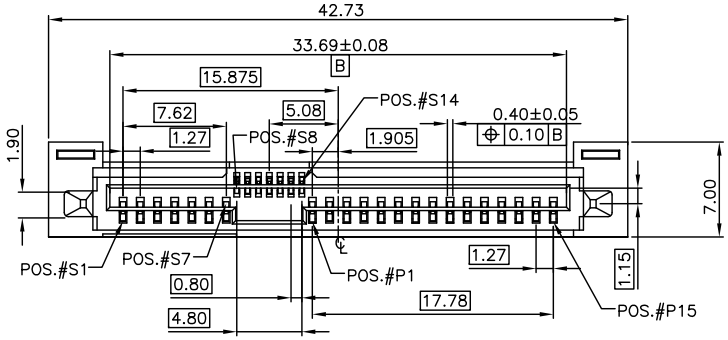

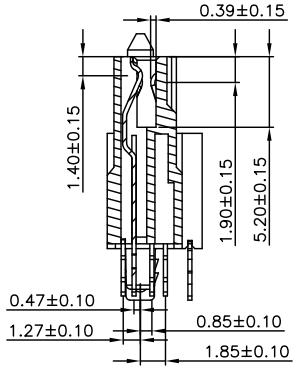

SECTION A-A

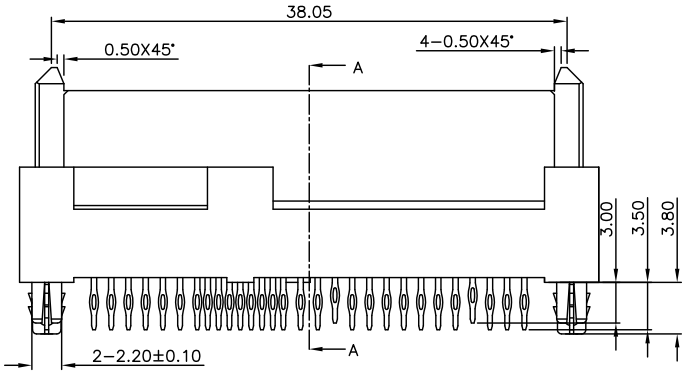

RECOMMENDED PCB LAYOUT

NOTE: THICKNESS=2.4mm

1.MATERIAL :
- HOUSING:High Temperature Thermoplastic,UL94V-0,COLOR:BLACK
- TERMINAL(max): Copper Alloy,THICKNESS=0.30mm
- TERMINAL(min): Copper Alloy,THICKNESS=0.30mm
- LATCH:SUS,THICK=0.30±0.01

2,PLATING:
- CONTACT: Au OVER 50u" MIN NICKEL UNDERPLATE
- SOLDER TAIL: 100u"MIN MISTY TIN 50u" MIN NICKEL UNDERPLATE

3.ELECTRONICAL SPECIFICATION:
- CURRENT RATING: 1.5 AMPERE PER CONTACT
- CONTACT RESISTANCE: 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN.
- DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC.
- OPERATING TEMPERATURE: -20°C~+85°C

NO	DESCRIPTION	Q'TY	UNIT

DIMENSION ARE MILLIMETERS
TOLERANCES ARE :
DECIMALS
.X ± 0.30
.XX ± 0.25
ANGLE:
X ± 3°

DO NOT SCALE DRAWING

APPROVALS		DATE
DRAWN	Jun.L	04/28'/08
CHECKED		
APPROVALS		

TITLE: SAS 29P 母頭魚眼孔加高型(W=2.7)

SIZE	SCALE :	DRAWING NO.	REV.
mm	1 : 1	000614	B

ID NO. XXXXXXXXXX SHEET 1 OF 1