

4

3

2

1



PART NO. SEE TABLE1

REVISIONS			
LTR	DESCRIPTION	Drawing	DATE
A	RELEASE NEW PRODUCT	GARY	12/29/07



CUSTOMER DRAWING

TABLE 1

020-01-00337	30U*GOLD(SEAL HOLE)	LCP BLACK	GP
020-01-00330	30 U" GOLD	LCP BLACK	GP
020-01-00331	30 U" GOLD	PBT BLACK	GP
020-01-00332	30 U" GOLD	PA9T BLACK	RoHS
020-01-00333	15 U" GOLD	LCP BLACK	GP
020-01-00334	15 U" GOLD	PBT BLACK	GP
020-01-00335	15 U" GOLD	PA9T BLACK	RoHS
PART NO.	GOLD PLATED	MATERIAL& COLOR	NOTE

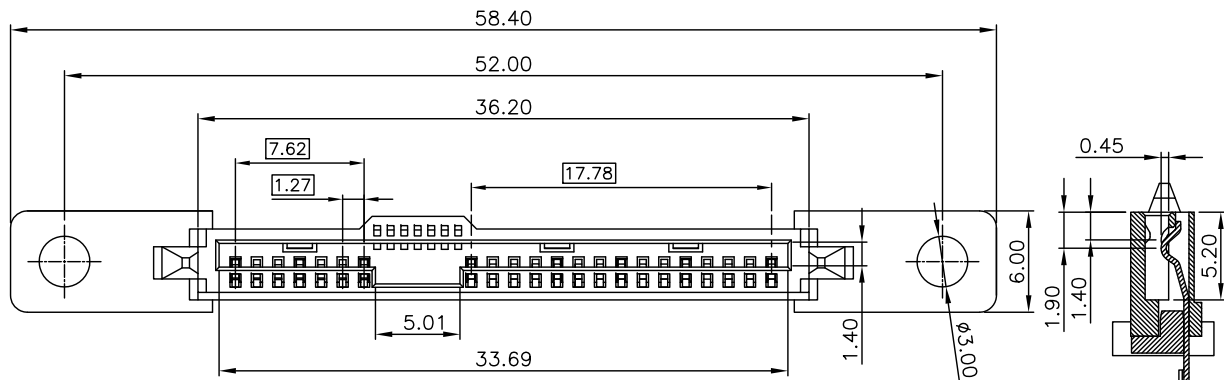

SECTION A-A

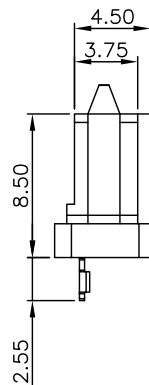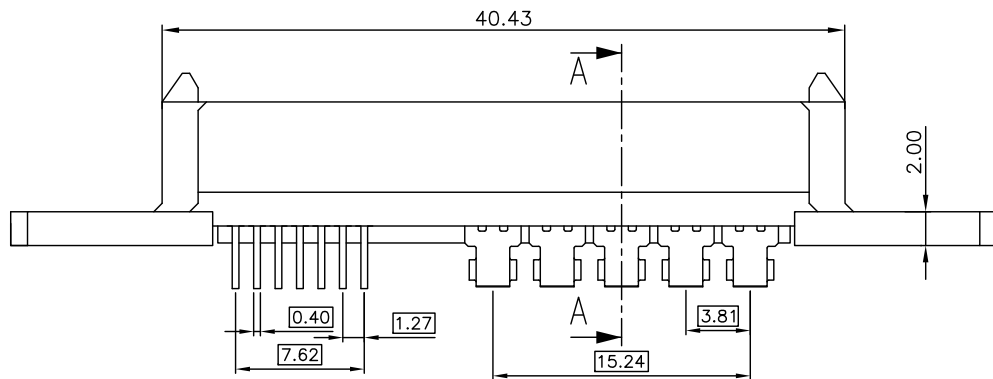

NOTE:

- MATERIAL :
HOUSING : HIGH TEMPERATURE THERMOPLASTIC ,UL94V-0
TERMINAL: COPPER ALLOY,THICKNESS = 0.30 mm
- PLATING:
CONTACT:GOLD OVER 50u" MIN NICKEL UNDERPLATE
SOLDER TAIL: 150u"MIN MISTY TIN 50u" MIN NICKEL UNDERPLATE
GOLD SPECIFICATION:SEE TABLE 1
- ELECTRONICAL SPECIFICATION:
CURRENT RATING: 1.5 AMPERE PER CONTACT
CONTACT RESISTANCE: 30 MILLIOHMS MAX.
INSULATION RESISTANCE: 1000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC.
OPERATING TEMPERATURE: -40°C~+85°C

DIMENSION ARE MILLIMETERS		APPROVALS		DATE	TITLE: SAS 29P SOCKET 加长带螺孔型 無小7PIN端子
TOLERANCES ARE :		DRAWN	GARY	12/29/07	
X ± 0.30		CHECKED			
.XX ± 0.25		APPROVALS			SIZE SCALE : DRAWING NO. REV.
ANGLE: X ± 3'					mm 1 : 1 000569 A
NO	DESCRIPTION	Q'TY	UNIT	DO NOT SCALE DRAWING	D NO. XXXXXXXXXX SHEET 1 OF 1

4

3

2

1