


Specification:

Current Rating:1.0A AC/DC
 Voltage Rating:125V AC/DC
 Contact Resistance:20m ohm Max
 Insulation Resistance:100M ohm Max
 Withstanding Voltage:250V AC For one Minute
 Operating Temperature Range:-40°C~+85°C
 Material and Finish
 Insulator:High Temp.Plastic (Nylon 6T UL94V-0)
 Insulator Color:Ivory
 Contact:Phosphor Bronze
 Plating:Tin Plated
 Package:1000pcs/Reel

How To Order:

1255R-XX-SM-TR
 Tape&Reel
 SMD Type
 No. of Contacts
 R:Right Angle

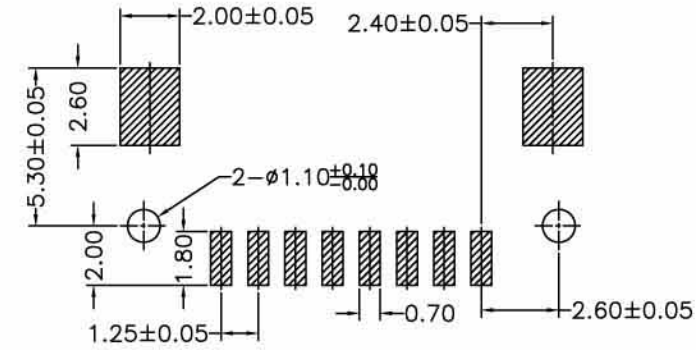

PCB LAYOUT

RoHS Compliant

Dimension:(2~30P)

Circuits	Dimension:			Circuits	Dimension:		
	A	B	C		A	B	C
02	1.25	7.45	6.45	11	12.50	18.70	17.70
03	2.50	8.70	7.70	12	13.75	19.95	18.95
04	3.75	9.95	8.95	13	15.00	21.20	20.20
05	5.00	11.20	10.20	14	16.25	22.45	21.45
06	6.25	12.45	11.45	15	17.50	23.70	22.70
07	7.50	13.70	12.70	20	23.75	29.95	28.95
08	8.75	14.95	13.95	25	30.00	36.20	35.20
09	10.00	16.20	15.20	30	36.25	42.45	41.45
10	11.25	17.45	16.45				

E				DRAWN:	GENERAL TOLERANCE:		
D				ANT Liu	.X=±0.2		
C				CHECKED:	.XX=±0.15		
B				Denny Li	UNIT: MM	DESCRIPTION:	SIZE
A	29-Jan-2004	(PC0006)	ANT Liu	APPROVAL:	SCALE:	1.25mm Wire To Borad Wafer R/A SMD Type	A4
REV	DATE	FILE	BY	Mike Wu	SHEET: 1 / 1	PART NO:	
					PROJECTION:	1255R-XX-SM-TR	