


Specifications:

Current Rating:1.0A AC/DC
 Voltage Rating:125V AC/DC
 Contact Resistance:20m ohm. max.
 Insulation Resistance:100M ohm. min.
 Withstanding Voltage:250V AC For One Minute
 Operating Temperature Range:-40°C ~ +85°C
 Material and Finish

Insulator:High Temp. Plastic(UL94V-0)
 Contact:Copper Alloy
 Finish:Tin Plated

How To Order
 1251RM-XX

— No. of Positions
 — Right Angle Type

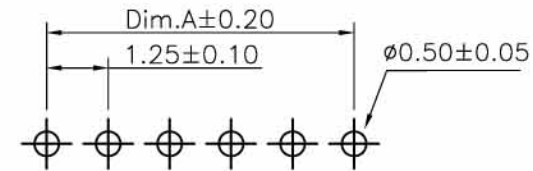

P.C.B Layout

Pos	Dim A	Dim B	Pos	Dim A	Dim B	Pos	Dim A	Dim B
2	1.25	4.25	7	7.50	10.50	12	13.75	16.75
3	2.50	5.50	8	8.75	11.75	13	15.00	18.00
4	3.75	6.75	9	10.00	13.00	14	16.25	19.25
5	5.00	8.00	10	11.25	14.25	15	17.50	20.50
6	6.25	9.25	11	12.50	15.50			

RoHS Compliant

				DRAWN: Sea	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15		
E				CHECKED: Jeremy Liu	UNIT: MM	DESCRIPTION: 1.25mm Wafer Right Angle Type	SIZE
D					SCALE:		
C				APPROVAL: MIKE	SHEET: 1 / 1	PART NO: 1251RM-XX	
B							
A	30-Jun-2005	(PC0006)	Cel king		PROJECTION:		
REV	DATE	FILE	BY				