


Specifications:

Current rating:1.0A AC,DC
 Voltage rating:125V AC,DC
 Contact resistance:20mΩ Max
 Insulation resistance:100MΩ Min
 Withstanding voltage: 250V AC/minute
 Operating temperature range : -40°C~+85°C
 Material:

Insulator:High Temp. Plastic(Nylon6T UL94V-0)
 Color:Beige
 Contact:Brass
 Metal Fitting:Phosphor Copper
 Plated:Gold Plated
 Package:900Pcs/Reel


How To Order:

1254SMB-XX-XX-TR

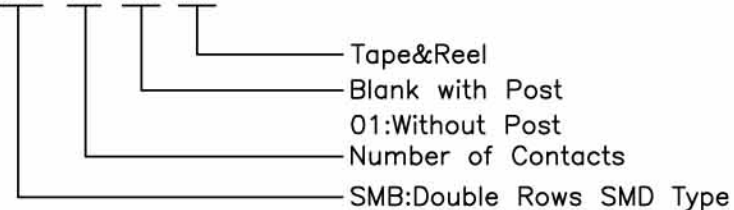

Dimension:

Pos	Dimension:			
	A	B	C	D
10	12.10	5.00	8.70	7.50
20	18.35	11.25	14.95	13.75
30	24.60	17.50	21.20	20.00
40	30.85	23.75	27.45	26.25
50	37.10	30.00	33.70	32.50

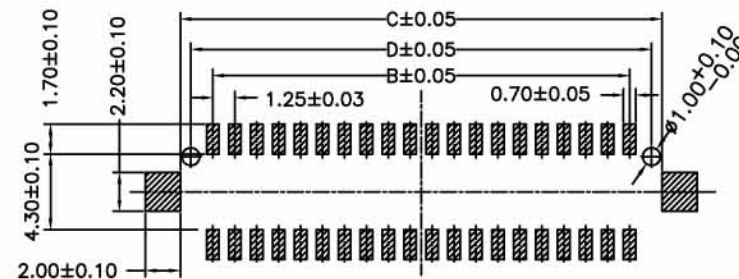

PCB LAYOUT

RoHS Compliant

REV	DATE	FILE	BY
C	24-Aug-2006	ECN-CN060814	Wendy
B	03-Dec-2003	ECN031205	Jeremy Liu
A	07-07-2003		Jeremy Liu

DRAWN: Jeremy Liu	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15
CHECKED: Jerry Chen	UNIT: MM
APPROVAL: Mike Wu	SCALE:1:1
	SHEET: 1 / 1
	PROJECTION:

DESCRIPTION: 1.25mm Wire To Board SMD Double Row Wafer	SIZE
PART NO: 1254SMB-XX-XX-TR	A4