





1254T



Section B-B





Section A-A



Specifications:
 Current Rating:1.0A AC/DC
 Voltage Rating:125V AC/DC
 Contact Resistance:20m ohm. max.
 Insulation Resistance:100M ohm. min.
 Withstanding Voltage:250V AC/minute
 Operating Temperature Range:-40°C to +85°C
 Material and Finish
 Insulator:High Temp. Plastic (UL94V-0)
 Contact:Copper Alloy
 Finish:Tin Plated
 How To Order
 1254HB-XX

No .Of Positions
 HB:Double Housing

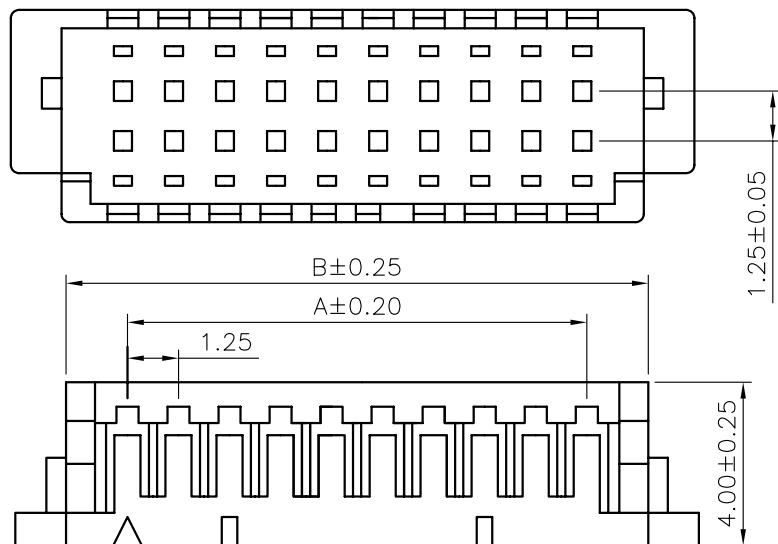

Poles	Part No	DIM:(mm)	
		A	B
10	1254HB-10	5.00	8.01
20	1254HB-20	11.25	14.26
30	1254HB-30	17.50	20.51
40	1254HB-40	23.75	26.76

RoHS Compliant

				DRAWN: OZR	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15		
E				CHECKED: Jeremy Liu	UNIT: MM	DESCRIPTION: 1.25mm Housing Double Row	SIZE A4
D					SCALE:		
C				APPROVAL: Mike Wu	SHEET: 1 / 1	PART NO: 1254HB-XX	
B					PROJECTION:		
A	15-Oct-2005	(PC0006)	OZR				
REV	DATE	FILE	BY				