


1.	DAT 1	MIDDLE	7.	NC	MIDDLE	REV	MODIFICATION	DATE	DRAW
2.	DAT 0	MIDDLE	8.	VSS	LONG				
3.	VSS	MIDDLE	9.	CMD	MIDDLE				
4.	CLK	MIDDLE	10.	CD/DAT3	SHORT				
5.	VDD	LONG	11.	DAT 2	MIDDLE				
6.	NC	MIDDLE							

NOTES:  
 MATERIAL  
 HOUSING:HIGH TEMPERATURE THERMOPLASTIC  
 CONTACT:COOPER ALLOY  
 SHELL:COOPER ALLOY  
 PLATING  
 CONTACT AREA:GOLD PLATED OVER NI  
 SOLDER TAIL:100u" MIN Sn/Pb PLATED OVER NI  
 SHELL SOLDER AREA:GOLD PLATED OVER NI  
 PATING  
 CURRENT RATING:0.5A  
 VOLTAGE RATING:250VRMS  
 OPERATING  
 TEMPERATURE:-25C~+90C  
 SPECIFICATION  
 CONTACT RESISTANCE:40 MILLIOHMS  
 DIELECTRIC WITHSTANDING VOLTAGE:500VAC MEGOHMS  
 INSULATION RESISTANCE:100 MEGOHMS  
 ORDERING INFORMATION  
 MDDMF-111 XX B000  
 05:tin/gold 5u"

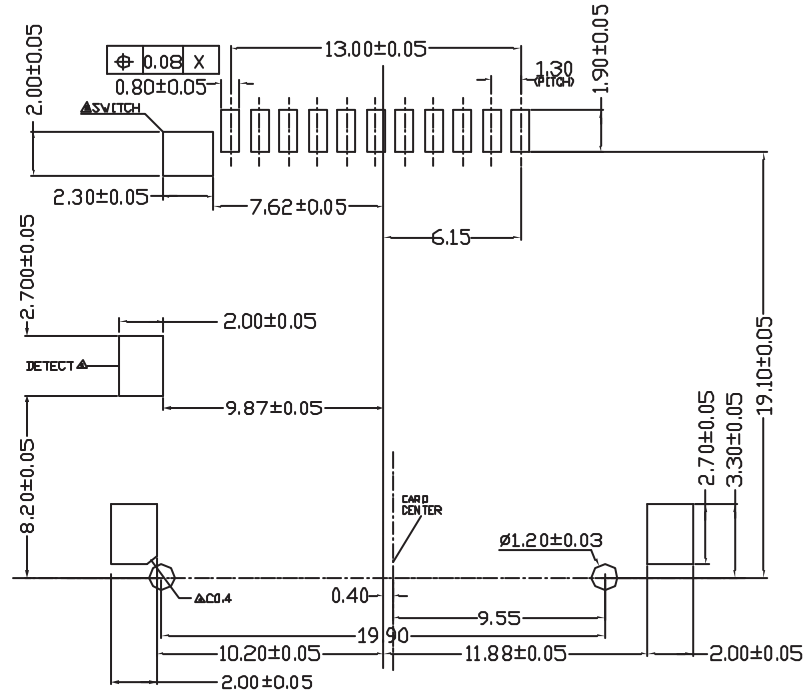

P.C.B layout

DIMENSION IN mm [Inch]		PROD. SPEC.	ALMITA CO., LTD.	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC.	TITLE MINI SD 2.0 CUSTOMER DRAWING	
.X±0.30	X'±1"	APPROVE	FILE NO.	DWG NO. MDDMF-111XXB000
.XX±0.20	.X'±0.5"	CHECK	PROJ.	SHEET 1 / 1
.XXX±0.10	.XX'±0.25"	DRAW	SCALE 3:1	REV A