


Pin Type	DIM L	Pin Type	REV	MODIFICATION	DATE	DRAW
Detect	3.5 mm	25,26	D	EN-02-0906	09/04/02'	TOM
General	4.25 mm	All Other Pins	E	EN-04-0211	02/20/04'	TONY
Power	5.0 mm	1,13,38,50	F	EN-05-0116	01/11/05'	TONY

DIMENSION IN mm [Inch]		PROD. SPEC. SP0028	ALMITA CO., LTD.	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC. PPP-CFC-004	CF CARD CONN. TYPE1,2 TITLE	
.X±0.30	X.'± 1"	APPROVE <i>[Signature]</i>	STAND-OFF 0.0mm NORMAL TYPE	CUSTOMER DRAWING
.XX±0.20	.X'± 0.5"	CHECK <i>[Signature]</i>	FILE NO. KFP-028	DWG NO. CFCMD-45XXXW00X
.XXX±0.10	.XX'± 0.25"	DRAW <i>[Signature]</i>	SIZE A4	PROJ. SHEET 1 / 2
			SCALE 1:1	REV F

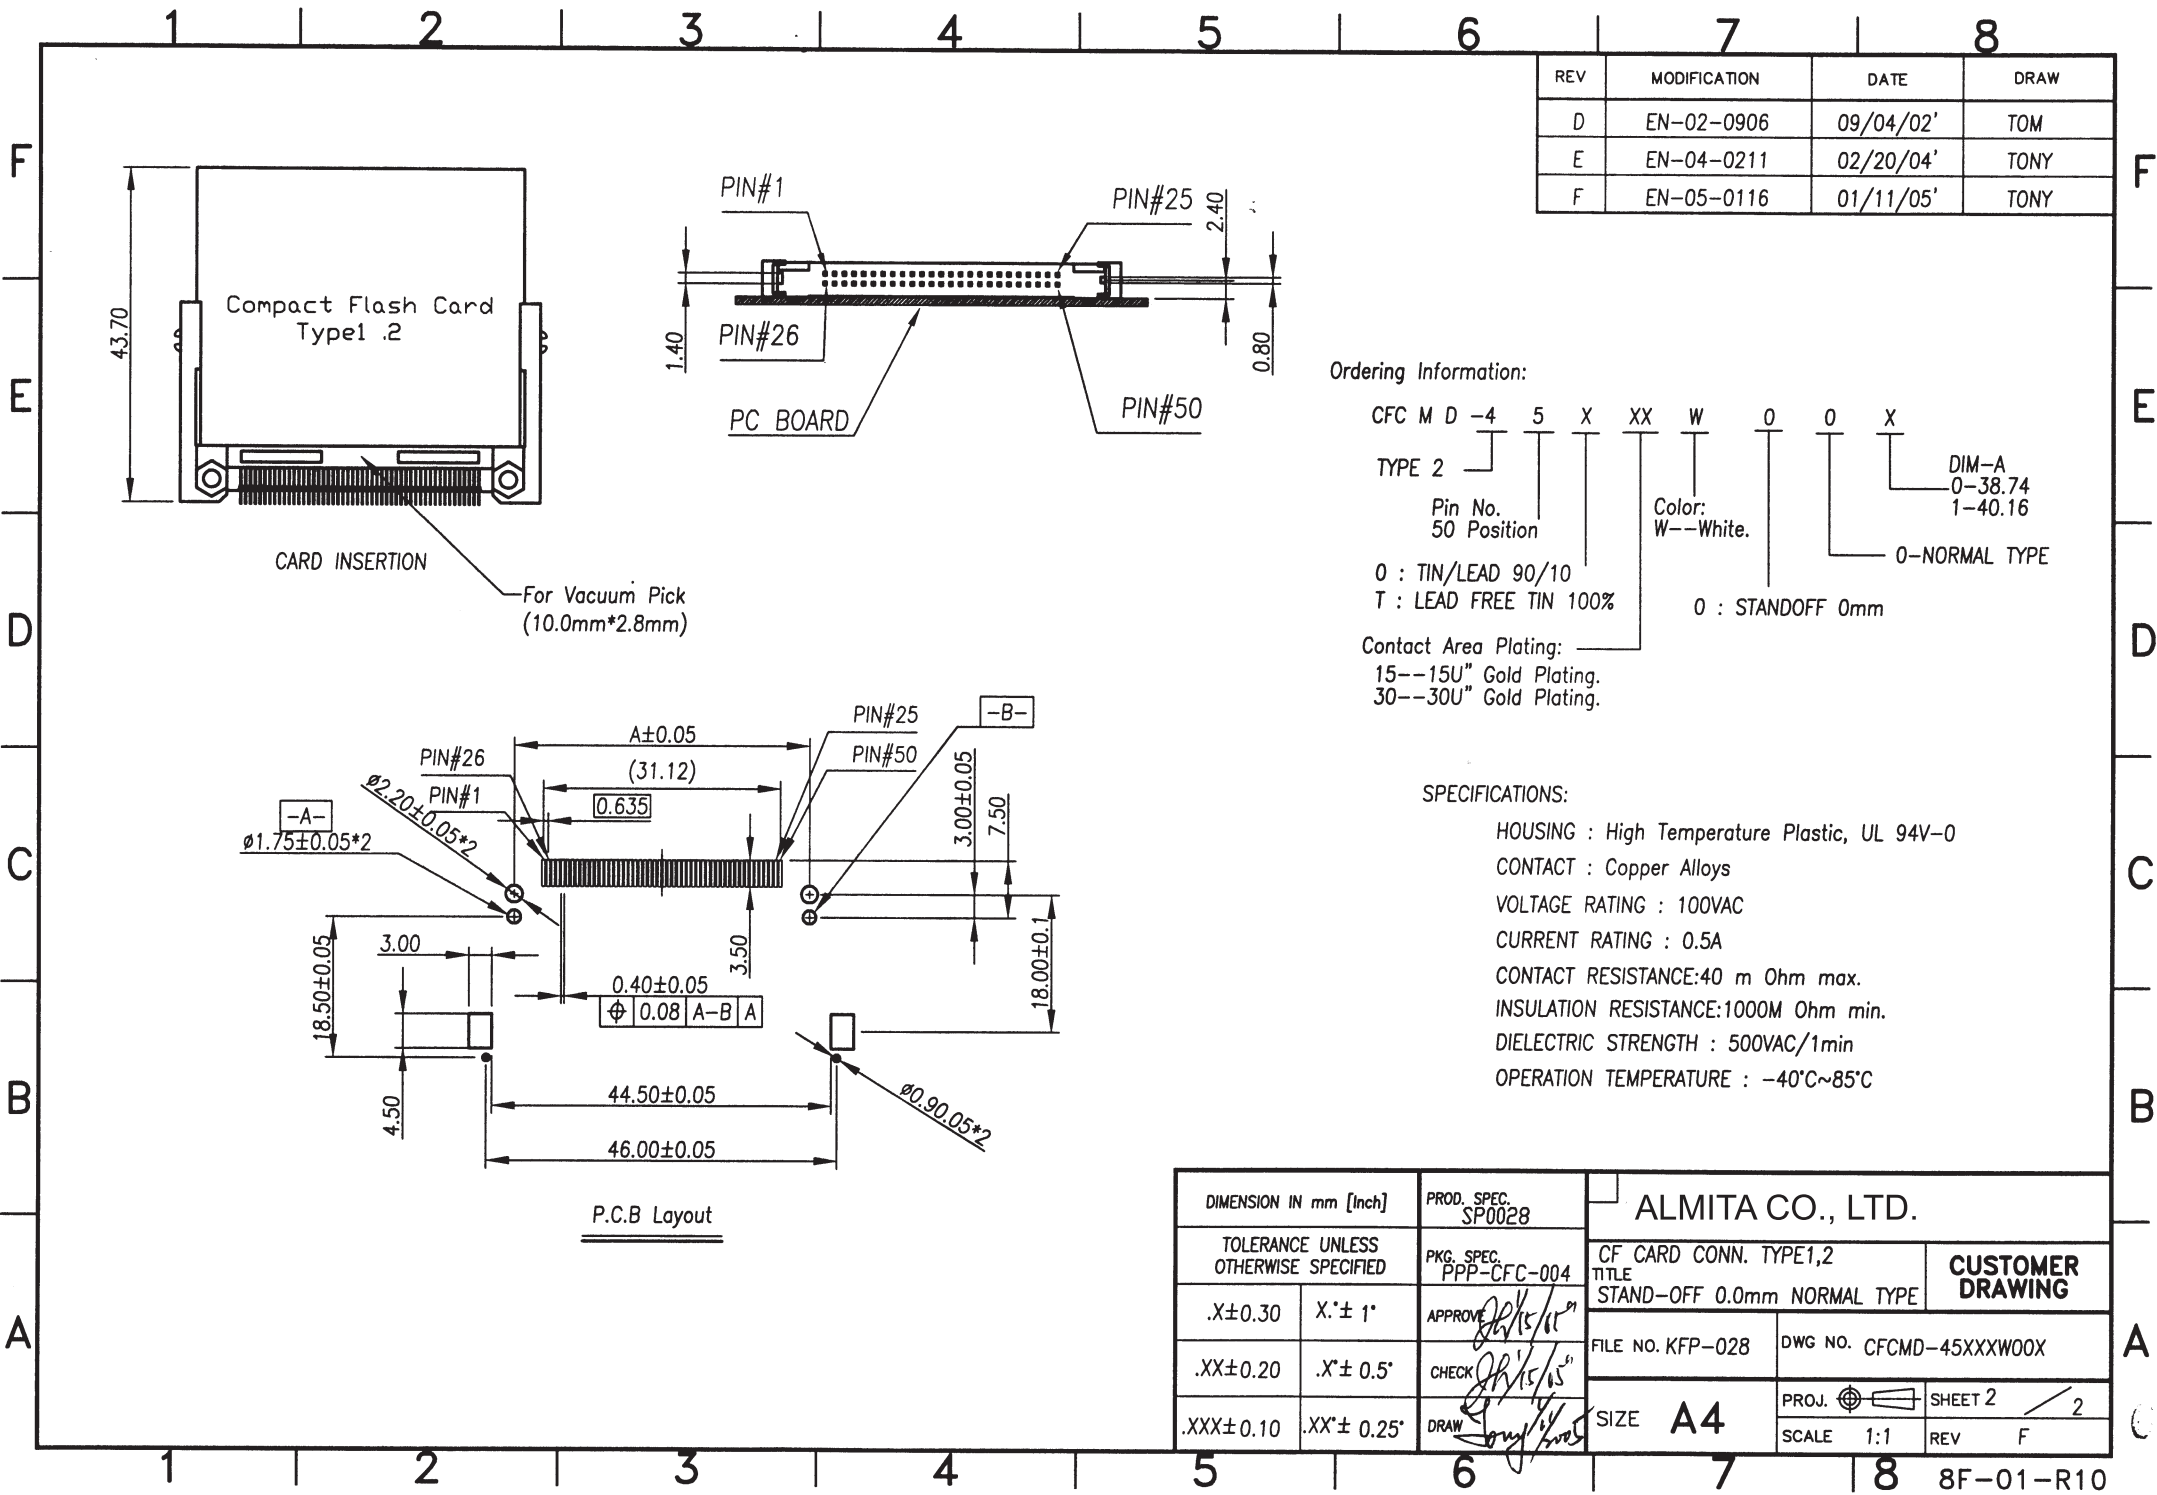

REV	MODIFICATION	DATE	DRAW
D	EN-02-0906	09/04/02'	TOM
E	EN-04-0211	02/20/04'	TONY
F	EN-05-0116	01/11/05'	TONY

Ordering Information:

CFC M D -4 5 X XX W 0 0 X
 TYPE 2
 Pin No. 50 Position
 Color: W--White.
 0 : TIN/LEAD 90/10
 T : LEAD FREE TIN 100%
 0 : STANDOFF 0mm
 DIM-A
 0-38.74
 1-40.16
 0-NORMAL TYPE
 Contact Area Plating:
 15--15U" Gold Plating.
 30--30U" Gold Plating.

SPECIFICATIONS:

HOUSING : High Temperature Plastic, UL 94V-0
 CONTACT : Copper Alloys
 VOLTAGE RATING : 100VAC
 CURRENT RATING : 0.5A
 CONTACT RESISTANCE:40 m Ohm max.
 INSULATION RESISTANCE:1000M Ohm min.
 DIELECTRIC STRENGTH : 500VAC/1min
 OPERATION TEMPERATURE : -40°C~85°C

DIMENSION IN mm [Inch]		PROD. SPEC. SP0028	ALMITA CO., LTD.	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC. PPP-CFC-004	CF CARD CONN. TYPE1,2 TITLE STAND-OFF 0.0mm NORMAL TYPE	CUSTOMER DRAWING
.X±0.30	X.'± 1"	APPROV. <i>[Signature]</i>	FILE NO. KFP-028	DWG NO. CFCMD-45XXXW00X
.XX±0.20	.X'± 0.5"	CHECK <i>[Signature]</i>	PROJ.	SHEET 2 / 2
.XXX±0.10	.XX'± 0.25"	DRAW <i>[Signature]</i>	SIZE A4	SCALE 1:1 REV F