


DWG No. 2K442601DV5

Version	Revise content	Check
5	新增 1.8 強化	Cheng

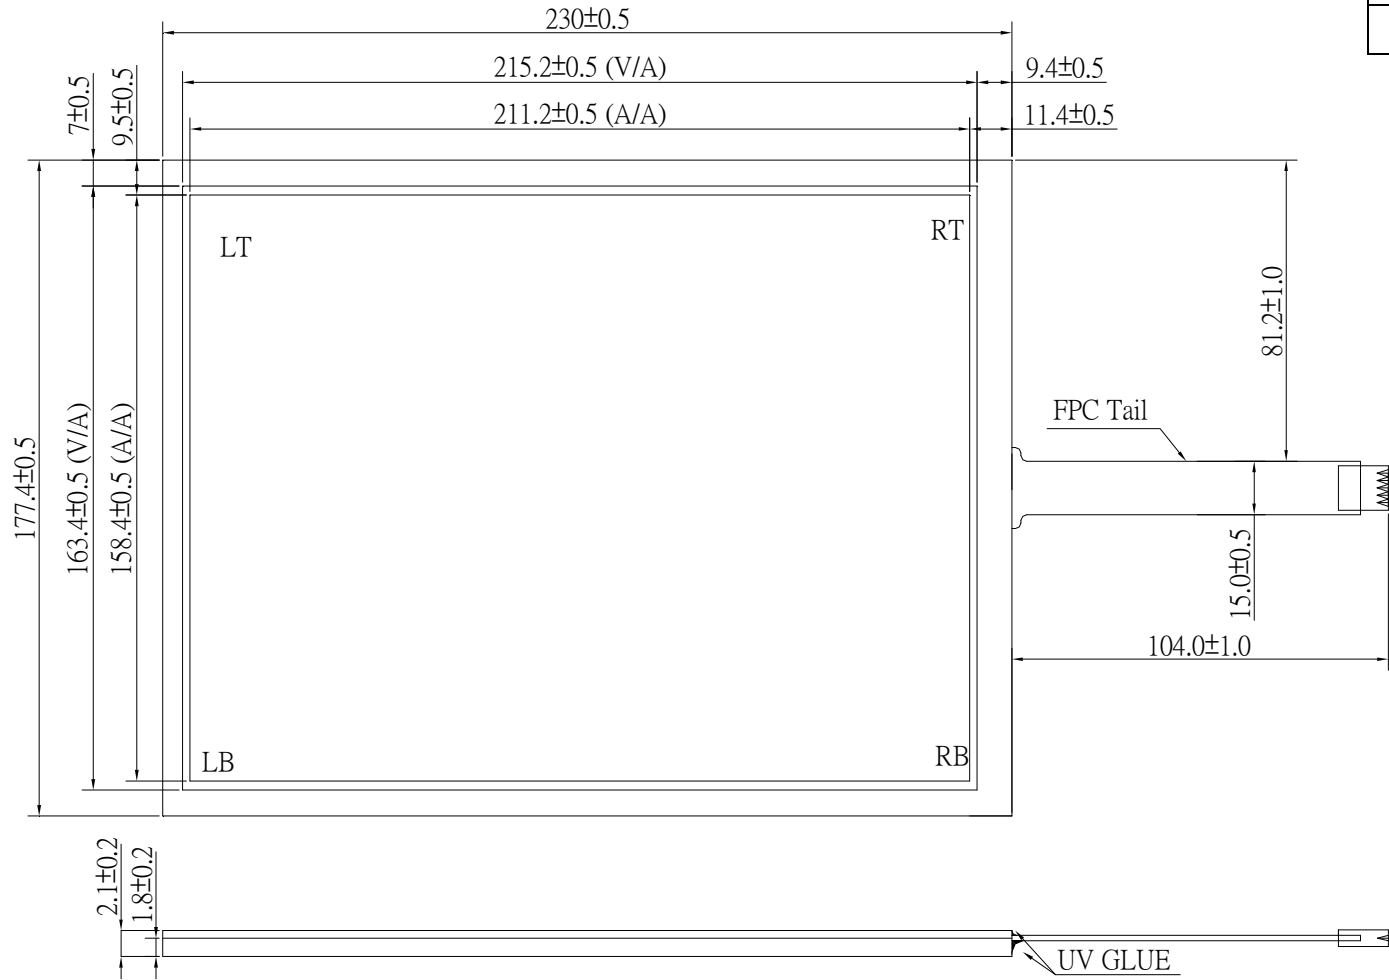

Note :

Pin 5 : LT

Pin 4 : RT

Pin 3 : AD-X

Pin 2 : RB

Pin 1 : LB

Pin Pitch : 2.54 mm

ITO Glass : 1.8 mm

Total Thickness :  $2.1 \pm 0.2$  mm

V/A : View Area

A/A : Active Area

Material	品名
ITO Glass : 1.8 mm	SE-5W230177-2
ITO Glass : Chemically Strengthen 1.8 mm	SE-5W230177-2C S



品名	SE-5W230177-2	製圖	Jason	良英股份有限公司 SUPER ELITE TECHNOLOGY CO., LTD	單位 : mm 公差 : 一般公差	發行日期:	04 - 26 - 2004
料號		確認	Cheng			變更日期:	07 - 09 - 2012

# Touch Panel Specification

SET

Page

2/2

## 1. Suitability

This specification suit analog resistance touch panel. which used in LCD module.

## 2. Apply To Specification

2.1.Surface Hardness : 3H ↑

2.2. Optical Clarity : 80 ±3 %

2.3 Operating Temperature : -10°C ~ 60°C

2.4 Storage Temperature : -20°C ~ 70°C

2.5 Operating Voltage : DC5V

2.6 Faceplate Surface : Anti-glare coating

2.7 Isolation Resistance : 20MΩ ↑ @DC25V

2.8 Linearity : ±1.5% ↓

2.9 Operation Pressure : 150g ↓

2.10 Resistance : 20Ω ~ 100Ω